

CURRENT SENSORS

NEW PRODUCT NEWS

Open Loop

Release scheduled for October 2016

HC-MA series



Rated Current 200A ~ 500A

- High precision realized with adoption of our own ASIC (temperature correction circuit built in)
- Non-ratio/ratiometric selectable
- Excellent noise characteristics
- 5V single power supply
- Chassis mounting type (HC-MAL) is included in the lineup in addition to bus bar mounting type



用途

Inverters, Servo drivers, Power supply equipment, Uninterruptible power supply (UPS), Welders, Power conditioning systems

<Bas bar attaching type>

* Please note that performance and characteristics of the product may be subject to change without prior notice.



◎ Dimensions (mm)

Terminal

- 1 ... NC
- 2 ... Vcc
- 3 ... Output
- 4 ... Reference Voltage
- 5 ... GND

Weight: 175g

<Bas bar attaching type>

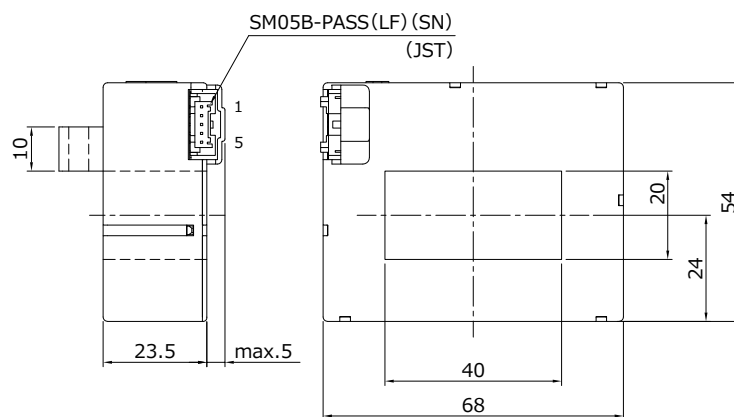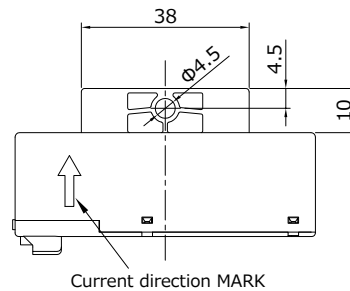

General tolerance: ± 0.5